


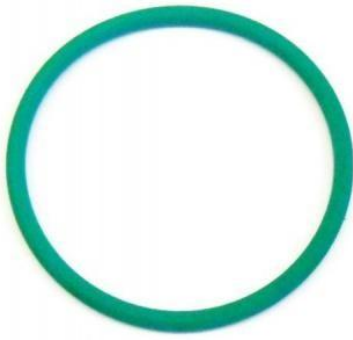

O-ring-Stocks.eu - Techniparts  
Rondweg 26  
8091XB, Wezep

E-MAIL [info@o-ring-stocks.eu](mailto:info@o-ring-stocks.eu)  
TEL +31382024043  
KVK 08174024

## O-ring 28.25x2.62 - FKM - FPM - Viton - 90 Shore A - Grün - ORS42052

<https://www.o-ring-stocks.eu/de/o-ring-28.25x2.62-fkm-fpm-viton-90-shore-a-grun-ors42052>

### Specificaties

|               |                                 |
|---------------|---------------------------------|
| Productnummer | 42052                           |
| Merk          | Eurolast                        |
| Categorie     | FKM O-Ringe - 90 Shore A - Grün |
| Materiaal     | FKM - FPM - Viton               |
| Kleur         | Groen                           |
| Farbe         | Green                           |

### Kernspezifikationen

|             |      |
|-------------|------|
| Genehmigung | None |
|-------------|------|

|                   |                                                       |
|-------------------|-------------------------------------------------------|
| Alternativer Name | Viton® - FKM                                          |
| Chemischer Name   | Fluorocarbon Rubber                                   |
| Description 2     | O-ring FKM - FPM - Viton 28.25x2.62                   |
| Größe im Text     | twenty eight comma twenty five by two comma sixty two |
| Markennamen       | Viton® - Du Pont - 3M - Solvay - Daikin               |
| Material          | FKM - FPM - Viton                                     |
| Packungseinheit   | O-ring                                                |
| Produkte name     | O-ring 28.25x2.62 FPM - Viton                         |

### Alternative Größe

|                        |              |
|------------------------|--------------|
| AS568 Größentabelle    | AS 122       |
| DIN 3771 Größentabelle | 28.25x2.62   |
| SMS 1586 Größentabelle | 28.25 X 2.62 |

### Kernspezifikationen

|                        |            |
|------------------------|------------|
| CS (Schnur Starke)     | 2.62 mm    |
| Härte                  | 90 Shore A |
| ID (Inner Durchmesser) | 28.25 mm   |
| Temperatur Max         | 205 °C     |
| Temperatur Min         | -20 °C     |