


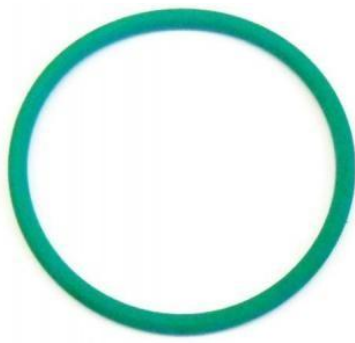

O-ring-Stocks.eu - Techniparts  
Rondweg 26  
8091XB, Wezep

E-MAIL [info@o-ring-stocks.eu](mailto:info@o-ring-stocks.eu)  
TEL +31382024043  
KVK 08174024

## Joint Torique 582.68x6.99 - FKM - FPM - Viton- 75 Shore A - Rouge -

<https://www.o-ring-stocks.eu/fr/joint-torique-582.68x6.99-fkm-fpm-viton-75-shore-a-rouge-ors175701>

### Specificaties

|               |                                  |
|---------------|----------------------------------|
| Productnummer | 175701                           |
| Merk          | Eurolast                         |
| Categorie     | FKM O-Rings - 80 Shore A - Groen |
| Materiaal     | FKM - FPM - Viton                |
| Kleur         | GROEN                            |
| Kleur         | Green                            |

### Basis Specificaties

|          |      |
|----------|------|
| Keurmerk | None |
|----------|------|

|                       |                                                                        |
|-----------------------|------------------------------------------------------------------------|
| Alternatieve benaming | Viton® - FKM                                                           |
| Chemische Benaming    | Fluorocarbon Rubber                                                    |
| Extra omschrijving    | O-ring 582.68x6.99                                                     |
| Maat in tekst         | five hundred and eighty two comma sixty eight by six comma ninety nine |
| Materiaal             | FKM - FPM - Viton                                                      |
| Merknamen             | Viton® - Du Pont - 3M - Solvay - Daikin                                |
| Omschrijving-2        | O-ring FKM - FPM - Viton 582.68x6.99                                   |
| Verpakkingseenheid    | O-ring                                                                 |

### Alternative maat

|               |               |
|---------------|---------------|
| AS568 Maat    | AS 472        |
| DIN 3771 Maat | 582.68 x 6.99 |
| SMS 1586 Maat | 582.68x6.99   |

### Basis Specificaties

|                     |            |
|---------------------|------------|
| CS (snoer dikte)    | 6.99 mm    |
| Hardheid            | 75 Shore A |
| ID (binnendiameter) | 582.68 mm  |
| Temperatuur Max     | 205 °C     |
| Temperatuur Min     | -20 °C     |