


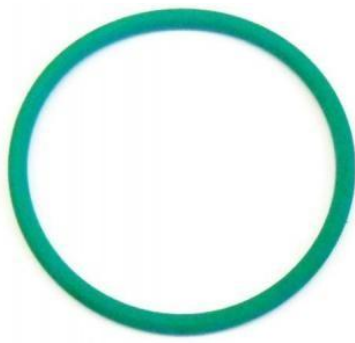

O-ring-Stocks.eu - Techniparts  
Rondweg 26  
8091XB, Wezep

E-MAIL [info@o-ring-stocks.eu](mailto:info@o-ring-stocks.eu)  
TEL +31382024043  
KVK 08174024

## Joint Torique 100.97x6.99 - HNBR - 70 Shore A - Vert -ORS49948

<https://www.o-ring-stocks.eu/fr/joint-torique-100.97x6.99-hnbr-70-shore-a-vert-ors49948>

### Specificaties

|               |                                   |
|---------------|-----------------------------------|
| Productnummer | 49948                             |
| Merk          | Eurolast                          |
| Categorie     | HNBR O-Rings - 70 Shore A - Groen |
| Materiaal     | HNBR - Buna                       |
| Kleur         | Groen                             |
| Kleur         | Green                             |

### Basis Specificaties

|          |      |
|----------|------|
| Keurmerk | None |
|----------|------|

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| Alternatieve benaming | Hydrogenated Nitrile Butadiene Rubber                       |
| Chemische Benaming    | Hydrogenated nitrile rubber                                 |
| Extra omschrijving    | O-ring 100.97x6.99 HNBR                                     |
| Maat in tekst         | one hundred and comma ninety seven by six comma ninety nine |
| Materiaal             | HNBR                                                        |
| Merknamen             | LG Chem - Lanxess and Zeon                                  |
| Omschrijving-2        | O-ring HNBR - 100.97x6.99                                   |
| Verpakkingseenheid    | O-ring                                                      |

### Alternative maat

|               |               |
|---------------|---------------|
| AS568 Maat    | AS 421        |
| DIN 3771 Maat | 100.97x6.99   |
| SMS 1586 Maat | 100.97 X 6.99 |

### Basis Specificaties

|                     |            |
|---------------------|------------|
| CS (snoer dikte)    | 6.99 mm    |
| Hardheid            | 70 Shore A |
| ID (binnendiameter) | 100.97 mm  |
| Temperatuur Max     | 150 °C     |
| Temperatuur Min     | -25 °C     |