


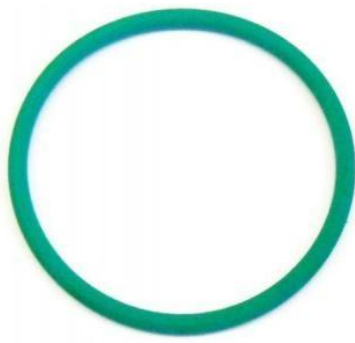

O-ring-Stocks.eu - Techniparts  
Rondweg 26  
8091XB, Wezep

E-MAIL [info@o-ring-stocks.eu](mailto:info@o-ring-stocks.eu)  
TEL +31382024043  
KVK 08174024

## O-ring 329.3x5.7 - FKM - FPM - Viton - 70 Shore A - Verde - ORS41992

<https://www.o-ring-stocks.eu/it/o-ring-329.3x5.7-fkm-fpm-viton-70-shore-a-verde-ors41992>

### Specificaties

|               |                                  |
|---------------|----------------------------------|
| Productnummer | 41992                            |
| Merk          | Eurolast                         |
| Categorie     | FKM O-Rings - 70 Shore A - Groen |
| Materiaal     | FKM - FPM - Viton                |
| Kleur         | Groen                            |
| Kleur         | Green                            |

### Basis Specificaties

|          |      |
|----------|------|
| Keurmerk | None |
|----------|------|

|                       |                                                                  |
|-----------------------|------------------------------------------------------------------|
| Alternatieve benaming | Viton® - FKM                                                     |
| Chemische Benaming    | Fluorocarbon Rubber                                              |
| Extra omschrijving    | O-ring 329.3x5.7 FPM - Viton                                     |
| Maat in tekst         | three hundred and twenty nine comma thirty by five comma seventy |
| Materiaal             | FKM - FPM - Viton                                                |
| Merknamen             | Viton® - Du Pont - 3M - Solvay - Daikin                          |
| Omschrijving-2        | O-ring FKM - FPM - Viton 329.3x5.7                               |
| Verpakkingseenheid    | O-ring                                                           |

### Alternative maat

|               |             |
|---------------|-------------|
| DIN 3771 Maat | 329.3x5.7   |
| SMS 1586 Maat | 329.3 X 5.7 |

### Basis Specificaties

|                     |            |
|---------------------|------------|
| CS (snoer dikte)    | 5.7 mm     |
| Hardheid            | 70 Shore A |
| ID (binnendiameter) | 329.3 mm   |
| Temperatuur Max     | 205 °C     |
| Temperatuur Min     | -20 °C     |