


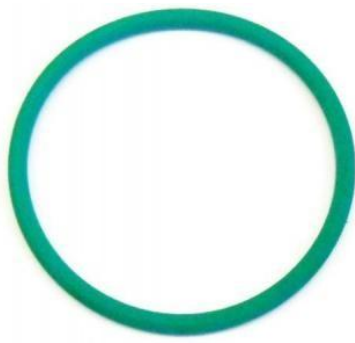

O-ring-Stocks.eu - Techniparts  
Rondweg 26  
8091XB, Wezep

E-MAIL [info@o-ring-stocks.eu](mailto:info@o-ring-stocks.eu)  
TEL +31382024043  
KVK 08174024

## O-ring 506.86x6.99 - FKM - FPM - Viton - 70 Shore A - Green - ORS42017

<https://www.o-ring-stocks.eu/o-ring-506.86x6.99-fkm-fpm-viton-70-shore-a-green-ors42017>

### Specificaties

|               |                                  |
|---------------|----------------------------------|
| Productnummer | 42017                            |
| Merk          | Eurolast                         |
| Categorie     | FKM O-Rings - 70 Shore A - Green |
| Materiaal     | FKM - FPM - Viton                |
| Kleur         | Groen                            |
| Color         | Green                            |

### Core Spec's

|          |      |
|----------|------|
| Approval | None |
|----------|------|

|                   |                                                                |
|-------------------|----------------------------------------------------------------|
| Alternative names | Viton® - FKM                                                   |
| Chemical Name     | Fluorocarbon Rubber                                            |
| Description 2     | O-ring FKM - FPM - Viton 506.86x6.99                           |
| Material          | FKM - FPM - Viton                                              |
| Packaging Unit    | O-ring                                                         |
| Product name      | O-ring 506.86x6.99 FPM - Viton                                 |
| Size in text      | five hundred and six comma eighty six by six comma ninety nine |
| Trade names       | Viton® - Du Pont - 3M - Solvay - Daikin                        |

### Alternative Size

|                     |               |
|---------------------|---------------|
| AS568 Size Chart    | AS 469        |
| DIN 3771 Size Chart | 506.86x6.99   |
| SMS 1586 Size chart | 506.86 X 6.99 |

### Core Spec's

|                     |            |
|---------------------|------------|
| CS (Cross Section)  | 6.99 mm    |
| Hardness            | 70 Shore A |
| ID (inner diameter) | 506.86 mm  |
| Temperature Max     | 205 °C     |
| Temperature Min     | -20 °C     |